

Small Multi-channel Data Acquisition System

MULTI RECORDER TMR-300 Series



- Strain gauge
- Strain gauge type transducer
- DC voltage
- Thermocouple
- Square wave or Sine wave
- Charge output type accelerometers
- CAN signal



Tokyo Measuring Instruments Lab.

Small Multi-channel Data Acquisition System

MULTI-RECORDER TMR-300 Series

Multi-recorder TMR-300 Series is a compact multi-channel data acquisition system that can combine various measurement units according to the purpose of measurement. Due to its compact size and light weight, the system can be easily installed not only on existing structures such as machines and bridges in which the installation space is restricted, but also on moving bodies such as automobiles, aircrafts and ships. For the measurement of automobiles, the system is applicable to sensors used for various purposes of tests including traveling performance, maneuverability, ride comfort and safety.

Measurement units for inputting sensors are available in several types for strain gauges, strain gauge type transducers, DC voltage or thermocouples. Control unit is used for controlling 10 measurement units (80 measurement points) at maximum and communicating with a computer. The control unit and the measurement units can be connected together and placed in a small space, or each measurement unit can be distributed to the vicinity of the sensors to be inputted.

The control unit is equipped with interfaces, and various settings and start of measurement are controlled from display unit. It is also possible to control the system from a computer connected via USB or LAN interface. The built-in wireless LAN enables operation and monitor display using a tablet PC. (Built-in wireless LAN is not available for overseas model.)



Strain gauge



Strain gauge type transducer



DC voltage




Thermocouple



Continuous data output function

By connecting the control unit TMR-311 to a personal computer with a LAN cable, measured data can be recorded directly into the computer. Long time recording is possible without depending on the capacity of data memory or SD card, which makes the system suited to fatigue test.

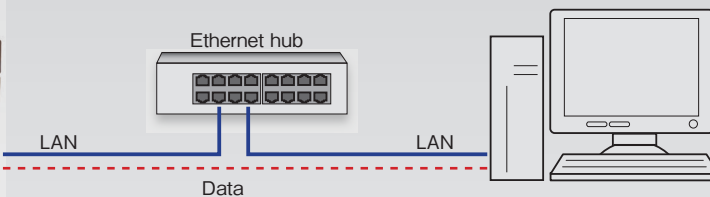


Measured data are saved in recording media of the personal computer such as HDD by using Real time data acquisition software RD-7300 (standard accessory) or RD-7640 (option)


Carrier type strain unit less affected by noise

Applicable unit: Carrier type strain unit TMR-323

Carrier type strain unit, which is less affected by noise, is available in TMR-300 series. Carrier wave bridge excitation has the advantage of not being influenced by low frequency noise such as thermal electromotive force and commercial power noise. It also shows high SN ratio and excellent stability. The carrier type strain unit enables highly accurate measurement even in a site where induction noise or commercial power noise is expected. The number of measurement points is expandable up to 80.



Waveform affected by noise



Noise reduced by the use of carrier type strain unit

Flexible configuration to meet the measurement purpose

Standalone measurement using the display unit

By the connection of the display unit TMR-381, control of multi-recorder system including the setting of each unit, the measurement control (balancing, start and stop of measurement, automatic measurement setting), the monitoring (T-Y Sweep, Y-T Cont., X-Y, Value) and the setting file management become possible without using a computer. When the dedicated I/F cable is used, the display unit is powered by the control unit without using an external power supply. It is

also possible to connect the display unit using a LAN cable. In this case, the connection can be extended up to 100 meters, and a USB battery charger is used as a power supply. Since the display unit is driven independently of the control unit TMR-311, the measurement will be continued even if the display unit is turned off after the start of automatic measurement. The display unit may be connected when stopping the measurement or checking the measured data.



- Usable as a measurement controller for in-vehicle test such as automobiles
- For dynamic loading test of a road, the measurement can be carried out while confirming the test vehicle by the display unit with its connection extended using a LAN cable.

Control using a tablet PC

The wireless LAN(*1) built in the TMR-311 enables operation and monitor display using a tablet PC.

(*1) Built-in wireless LAN is not available for overseas model.




Distributed connection


For measurement of automobiles

Measurement units are scattered by extending the cable between the control unit and measurement unit, and/or between adjacent measurement units

- Control cable
- CR-6490 (3cm) standard accessory
- CR-6491 (1m)
- CR-6493 (3m)
- CR-6495 (5m)

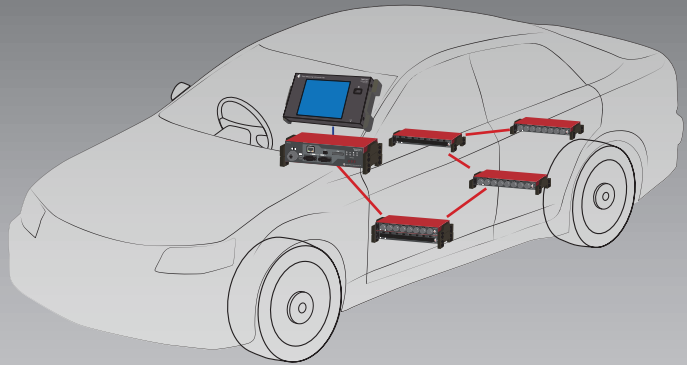

For multi-point measurement of bridges

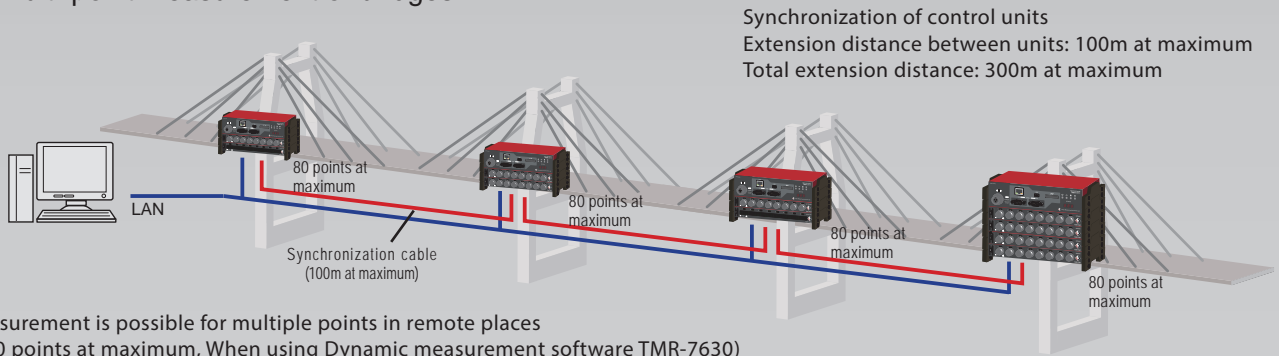


Measurement is possible for multiple points in remote places
(320 points at maximum, When using Dynamic measurement software TMR-7630)

For scattered measurement points (factory, etc.)

By using a distribution unit TMR-371, ten measurement units at maximum can be distributed.
(A distribution adapter is required for each unit.)

- Cabling to control unit is saved by distributing the measurement units
- As each measurement unit is placed in the vicinity of sensors, each sensor is connected to the measurement unit using a short cable. This also helps to save labour and cost for sensor cabling.

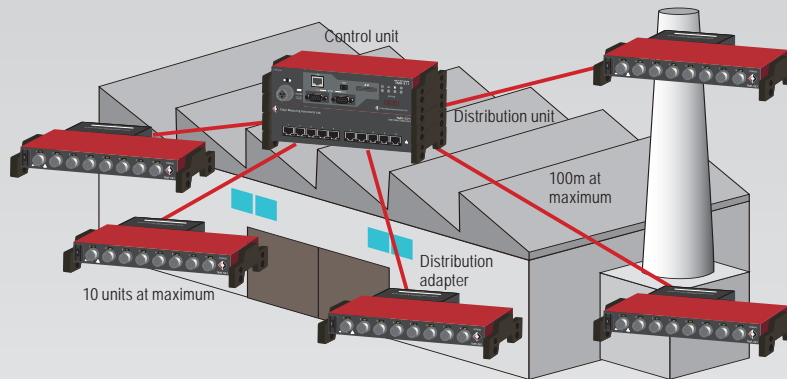


Measurement example of railroad cars

By using the distribution unit TMR-371, measurement units can be arranged in star-type connection within a distance of 100 meters, and synchronized measurement crossing two or more cars easily becomes possible.

Measurement items of cars

- Ride comfort
- Vibration stress of car body and bogie
- Contact force of pantograph
- Stress and temperature of brake disc
- Coupler force

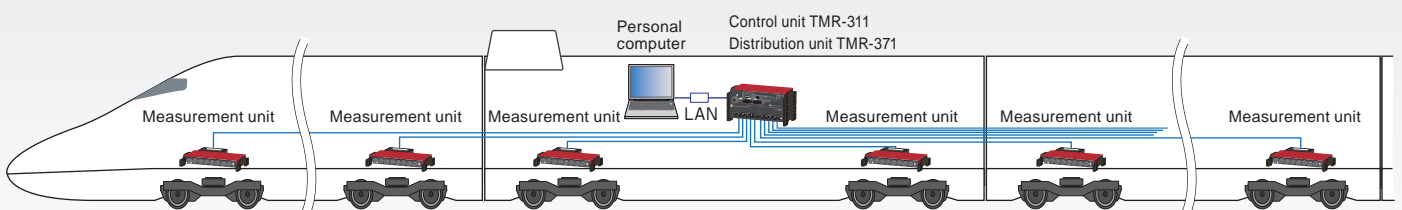

FEATURES

Combination of measurement units for various sensors is possible

Several types of measurement units can be combined according to the types of sensors and the purpose of measurement. Measurement units are connected in cascade to the control unit using supplied control cables CR-6490.



High resolution mode (0.1×10^{-6} strain) provided

Applicable unit: Strain full bridge unit, Strain 1G2G4G unit

Measurement with resolution of 0.1×10^{-6} strain is possible by setting 2000×10^{-6} strain range.

High speed sampling of 100kHz

Acquisition of time domain waveform is possible in a fast phenomenon such as shock load.

Measurement units can be arranged optionally

Depending on the number and arrangement of the sensors, measurement units can be arranged optionally using distribution units, control cables and synchronization cables. This helps to save labour and cost for sensor cabling and also to perform stable measurement.

Compact size, anti-vibration and DC drive; suited to vehicle onboard measurement

Due to its compact size, light weight and vibration tolerance, multi-recorder is suited to vehicle onboard measurement. The control unit TMR-311 is driven by a DC power supply, and the power for each measurement unit is supplied from the control unit. Supply voltage range is DC 10 to 30 V.

Measurement of 80 points at maximum (320 points at maximum for synchronized measurement)

One control unit TMR-311 connects and controls up to 10 measurement units for measurement of 80 points at maximum. Furthermore, it is possible to synchronize four control units for measurement of 320 points at maximum.


Unit numbers are easily checked and changed



Each measurement unit is equipped with a unit number setting switch on its front panel. The unit number is easily checked on the spot and it can be changed by the switch if required.

Disconnection check by channel LED


An LED indicator is provided for each channel. The LED flickers if the channel is open (the sensor is disconnected) or over (the value is over the measuring range). Sensor problem is found at a glance.

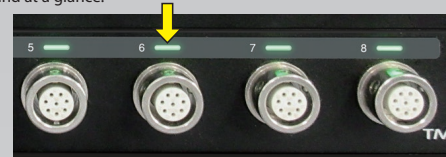

Data saving in momentary power failure and automatic restart after power recovery

Multi recorder has an UPS (uninterruptible power supply) circuit. If a momentary power failure occurs unexpectedly, measurement is stopped and data are saved in the SD card automatically before shutting down. When CONTINUE or FREE RUN is selected as the trigger mode, measurement is started again after power recovery.

System Block Diagram

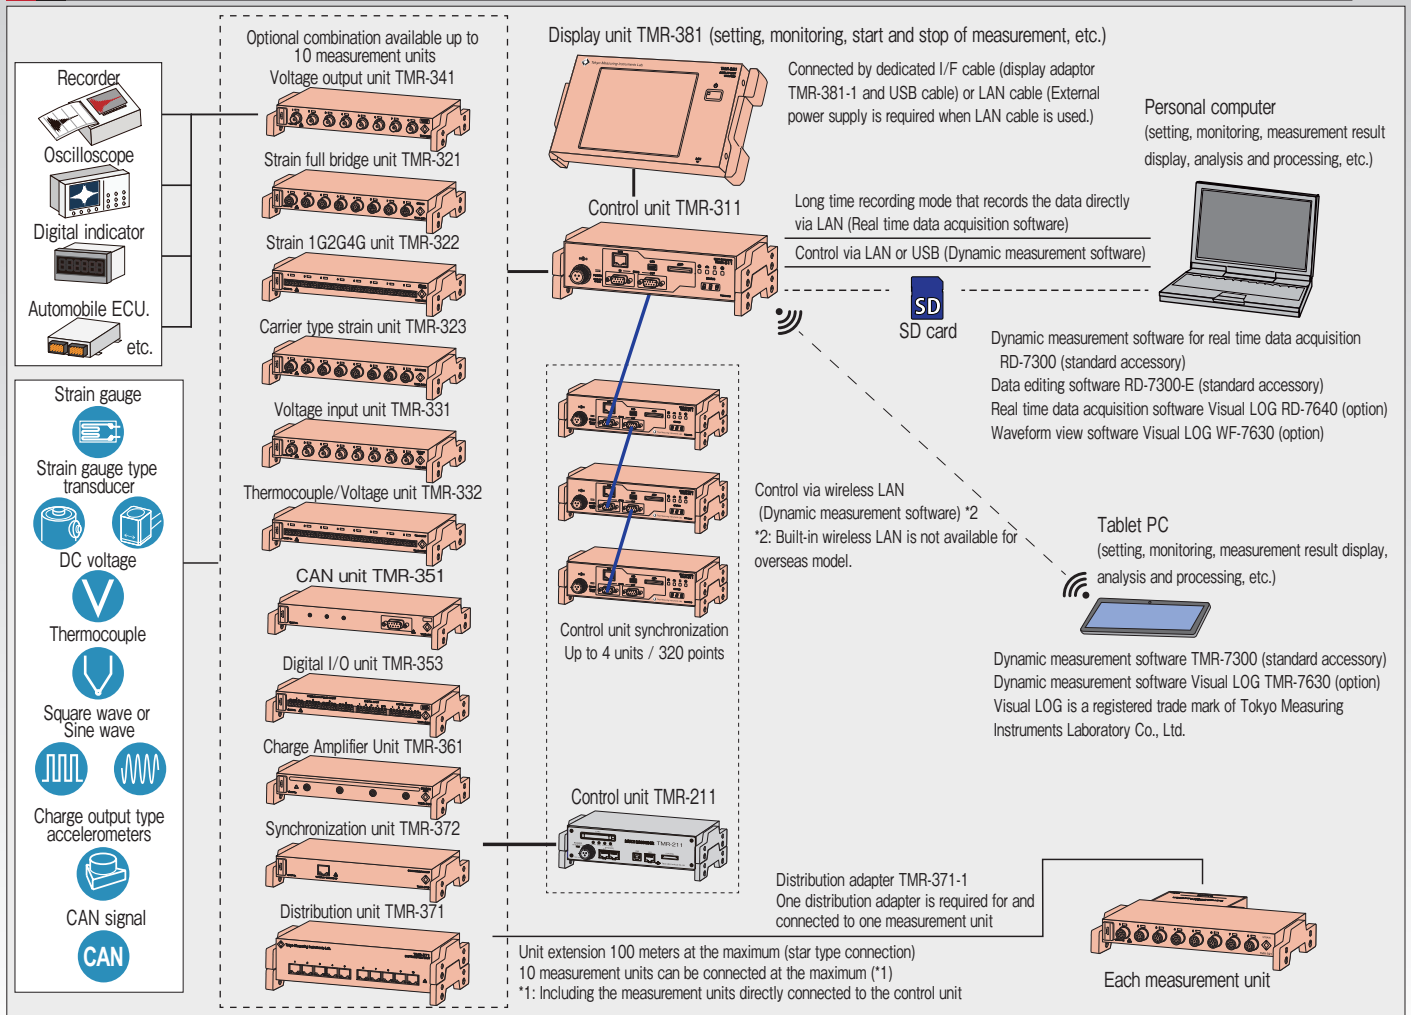


Control Unit TMR-311



Front side

LAN port
Connected to a personal computer using a LAN cable with RJ-45 connector (Use a cross cable for direct connection)

USB port
USB cable CR-6187 supplied with this instrument is connected. USB driver is installed to a personal computer from the software supplied with this instrument.

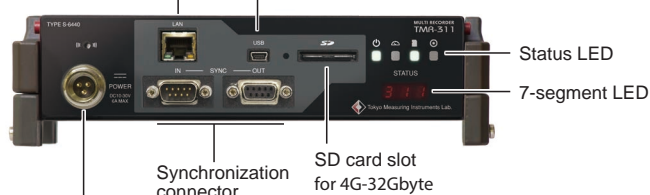

DC power connector
DC power cable supplied with this instrument is connected. Power On/Off switch is not provided. This instrument turns into operation when a power source is connected.

Synchronization connector


SD card slot for 4G-32Gbyte

Status LED

7-segment LED

Rear side

A flat cable connector for cascading up to 10 measurement units is equipped on the rear side of this instrument. Control cable CR-6490 supplied with the measurement unit is used for connection.

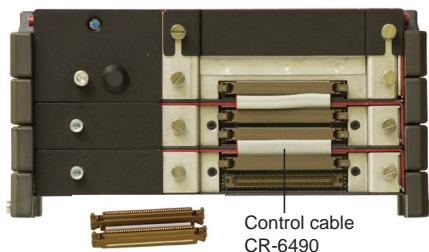

Control cable CR-6490

SD card up to 32GB usable

Measured data are stored in SD card. SD card up to 32GB can be used to enable long-time data recording. It is also possible to perform recording in high speed mode of 0.01ms.

Recording time of 16GB SD card (standard accessory)

Automatic recording mode Free-run
Sampling 1ms

Number of channels	Recording time
8 (1 unit)	Approx. 277 hours
80 (10 units)	Approx. 27 hours

USB, LAN and wireless LAN are provided for connection to a personal computer

Control unit TMR-311 is equipped with two interfaces USB(2.0) and LAN. In addition, built-in wireless LAN is provided to perform setting, monitoring and measurement by wireless using a tablet PC with the supplied software TMR-7300 installed. *2

*2: Built-in wireless LAN is not available for overseas model.

Controls 80 input points (10 measurement units of various types) at maximum USB/LAN interface

Specifications TMR-311

Number of measuring points	80 at maximum
Sampling	0.01 ~ 0.09ms (set by every 0.01ms) 0.1 ~ 0.9ms (set by every 0.1ms) 1 ~ 1000ms (set by every 1ms) 512, 1024, 2048, 4096, 8192 Hz
Data memory	128Mword (in high speed mode and SD card not inserted) Divided by number of recording points of every 8 points When recording 8 points or less: 16Mdata/point When recording 16 points or less: 8Mdata/point When recording 32 points or less: 4Mdata/point When recording 64 points or less: 2Mdata/point When recording 80 points or less: 1.6Mdata/point
Trigger function	
Data trigger	Data of optional channel (optional input level, or relative level from start)
Command trigger	Command from interface
Timer trigger	Real time, Interval
Synchronization of multiple units	Synchronization of sampling and trigger for up to 4 units of TMR-311 (320 measurement points) Maximum extension between two units: 100m
Recording media	SD card 4GB~32GB (SDHC high speed mode class 10)
Interface	LAN, USB, Wireless LAN (AP mode, IP fixed) *2 *2: Built-in wireless LAN is not available for overseas model.
Indication	Status LED (status, IP address, etc.)
Power supply	DC 10 ~ 30V, 0.6A at maximum (when 12V supplied, single unit) AC 100 ~ 240V, 50/60 Hz, 100VA at maximum (when using optional AC adapter CR-1897)
Environment	0 ~ +50°C, 85%RH or less (no condensation)
Vibration tolerance	29.4m/s ² (10 ~ 55Hz), 3 directions
External dimensions	200(W) × 50(H) × 100(D)mm (excluding projected parts)
Weight	Approx. 900g (including rubber protectors)

Standard accessories

Operation manual	1 copy
DC power supply cable CR-10	1 pc.
Ground wire CR-2020	1 pc.
USB cable CR-6187	1 pc.
SD card (16GB)	1 pc.
Dynamic Measurement Software TMR-7300	
Dynamic Measurement Software	
for real time data acquisition RD-7300	
Data Editing Software RD-7300-E (CD-ROM)	1 pc.
Software operation manual (CD-ROM enclosed)	3 copies

Dynamic Measurement Software TMR-7300

Dynamic measurement software TMR-7300 controls one TMR-311 for on-line and off-line measurement. It performs monitoring, acquisition, edition (listing and chart drawing) and processing of data, and also data calculation using expanded channels. In off-line measurement, free-run, data trigger and program measurement can be executed.

Dynamic Measurement Software RD-7300 for real time data acquisition


Dynamic measurement software RD-7300 is used to directly collect the data measured by TMR-300 series into a personal computer and to record them. Long-time and large-capacity recording is possible without depending on the capacity of the TMR-311 data memory or a SD card.

Data Editing Software RD-7300-E

Data editing software RD-7300-E can edit the data file which is collected by the dynamic measurement software RD-7300. Its editing function includes merging of files, calculation, data thinning and chart display. In addition, by converting the data into a text file of CSV format, it can be processed by our FFT analysis software DFA-7610.

7-segment LED of 3-digit to indicate the instrument status

Status including IP address setting and error code are indicated by the 3-digit 7-segment LED display on the front side of the TMR-311. The status of this instrument is easily checked.



Contents of indication by 7-segment LED

- IP address
- State of charge of UPS
- Wireless LAN status
- Serial number
- SD card information
- Power drop
- Error

Display Unit TMR-381



Connection of the display unit TMR-381 allows standalone operation of multi-recorder system including the setting of each unit, the measurement control (balancing, start and stop of measurement, automatic measurement setting), the monitoring (Y-T Sweep, Y-T Cont., X-Y, Value) and the setting file management. When the dedicated I/F cable is used, the display unit is powered by the control unit without using an external power supply. It is also possible to connect the display unit using a LAN cable. In this case, the connection can be extended up to 100 meters, and a USB battery charger is used as a power supply.

Standalone controller for TMR-311

Specifications TMR-381

Display	Color TFT liquid crystal display 320x240 dots (with touch screen)
Function	Various settings Control of measurement start/measurement stop/balancing Value monitor/Waveform monitor
Interface	Dedicated I/F, LAN
Power supply	Supplied from TMR-311 by the use of dedicated I/F or USB bus (Micro USB B connector)
Power supply voltage	DC 5V
Current consumption	600 mA at maximum
Environment	0 ~ +50°C 85%RH or less (no condensation)
Dimensions	200(W) x 30(H) x 110(D) mm (excluding projected parts)
Weight	Approx. 750g (including rubber protectors)

Standard accessories


Operation manual	1 copy
Dedicated I/F cable	1 pc.
Display adapter "TMR-381-1"	1 pc.

Since the display unit is driven independently of the control unit TMR-311, the measurement will be continued even if the display unit is turned off after the start of automatic measurement. The display unit may be connected when stopping the measurement or checking the measured data.

Examples of connection of display unit TMR-381


Control connection

- Power is supplied from TMR-311
- Extension distance 5 meters at the maximum

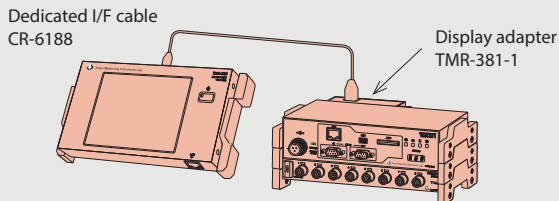


LAN connection


- Extension distance 100 meters at the maximum
- Power is supplied from USB bus

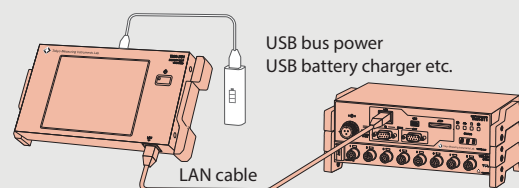


Connection setting screen



Setting of unit




Measurement setting




Others




Setting screen for each unit



Balancing result screen




Automatic measurement menu




Program measurement setting screen



Monitor screen




Y-T Sweep monitor




Y-T graph display (sweep display)

Y-T Cont. monitor



Y-T graph display (continuous display)



X-Y monitor




Strain Full Bridge Unit TMR-321



INPUT

Strain gauge type transducer
 Load cell
 Acceleration transducer etc.

DC Voltage


Specifications TMR-321

Number of measuring points	8
Input	Strain, Voltage (when using optional cable CR-4010)
[Strain measurement]	
Applicable gauge resistance	120 ~ 1000Ω
Bridge excitation	DC 0.5V, 2V
Measuring range	±20000×10 ⁻⁶ strain (bridge excitation DC 2V) ±80000×10 ⁻⁶ strain (bridge excitation DC 0.5V)
Measuring accuracy	±20000/10000/5000×10 ⁻⁶ strain range ±0.1%FS (at 23±5°C) ±2000×10 ⁻⁶ strain range ±0.2%FS (at 23±5°C)
Settable range	±20000/10000/5000/2000×10 ⁻⁶ strain range
Resolution	±20000/10000/5000×10 ⁻⁶ strain range 1×10 ⁻⁶ strain (bridge excitation 2V) 4×10 ⁻⁶ strain (bridge excitation 0.5V) ±2000×10 ⁻⁶ strain range 0.1×10 ⁻⁶ strain (bridge excitation 2V) 0.4×10 ⁻⁶ strain (bridge excitation 0.5V)
Balancing method	Electronic automatic
Balancing range	±10000×10 ⁻⁶ strain


Input unit for strain gauge type transducer and DC voltage 8 measurement points per one unit

Balancing accuracy	within ±3×10 ⁻⁶ strain
Stability on zero	±1×10 ⁻⁶ strain/°C (at maximum sensitivity)
Stability on sensitivity	±0.05%/°C (at maximum sensitivity)
[Voltage measurement] (when using optional cable CR-4010)	
Measuring range	±20 V
Measuring accuracy	±20/10/5V range: ±0.2%FS (at 23±5°C) ±2V range: ±0.3%FS (at 23±5°C)
Settable range	±20/10/5V range (1mV resolution) ±2V range (0.1mV resolution)
Frequency response	DC ~ 10kHz
Low pass filter	
Cutoff frequency	Digital filter 1Hz ~ 1kHz (settable by every 1Hz) and PASS (analog filter 10kHz) -3dB ± 1dB
Cutoff characteristics	1Hz ~ 1kHz: -12dB/oct or -48dB/oct Butterworth filter or Bessel filter PASS (10kHz): -12dB/oct Bessel filter
High pass filter	
Cutoff frequency	Digital filter 0.2Hz, 1Hz and OFF
A/D converter	24bit
Indicator	Channel LED (open, over, etc.) Unit number setting switch
Power supply	DC 10 ~ 30V, 0.2A at maximum (12V)(supplied from TMR-311)
Environment	0 ~ +50°C, 85%RH or less (no condensation)
Vibration tolerance	29.4m/s ² (10 ~ 55Hz), 3 directions
External dimensions	200(W) × 25(H) × 100(D)mm (excluding projected parts)
Weight	Approx. 550g (including rubber protectors)


Standard accessories



Operation manual (A3 folded in one-eighth)	1 copy
Control cable CR-6490	1 pc.
Sensor input cable CR-6186	8 pcs.

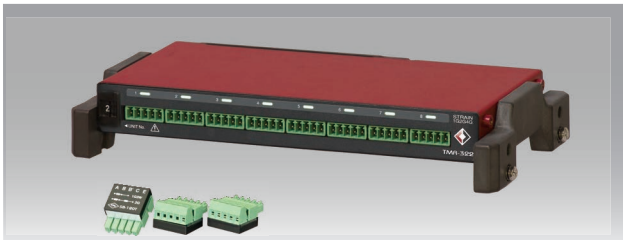Strain 1G2G4G unit TMR-322



INPUT

Strain gauge


Strain gauge type transducer
 Load cell
 Acceleration transducer etc.

Specifications TMR-322

Number of measuring points	8
Input	Strain
[Strain measurement]	
Applicable gauge resistance	120 ~ 1000Ω
Bridge excitation	DC 0.5V, 2V
Measuring range	±20000×10 ⁻⁶ strain (bridge excitation DC 2V) ±80000×10 ⁻⁶ strain (bridge excitation DC 0.5V)
Measuring accuracy	±20000/10000/5000×10 ⁻⁶ strain range ±0.1%FS (at 23±5°C) ±2000×10 ⁻⁶ strain range ±0.2%FS (at 23±5°C)
Settable range	±20000/10000/5000/2000×10 ⁻⁶ strain range
Resolution	±20000/10000/5000×10 ⁻⁶ strain range 1×10 ⁻⁶ strain (bridge excitation 2V) 4×10 ⁻⁶ strain (bridge excitation 0.5V) ±2000×10 ⁻⁶ strain range 0.1×10 ⁻⁶ strain (bridge excitation 2V) 0.4×10 ⁻⁶ strain (bridge excitation 0.5V)
Balancing method	Electronic automatic

Applicable to quarter, half and full bridge strain measurement

Balancing range	±10000×10 ⁻⁶ strain
Balancing accuracy	within ±3×10 ⁻⁶ strain
Stability on zero	±1×10 ⁻⁶ strain/°C (full bridge, at maximum sensitivity)
Stability on sensitivity	±0.05%/°C (full bridge, at maximum sensitivity)
Frequency response	DC ~ 10kHz
Low pass filter	
Cutoff frequency	Digital filter 1Hz ~ 1kHz (settable by every 1Hz) and PASS (analog filter 10kHz) -3 dB ± 1 dB
Cutoff characteristics	1Hz ~ 1kHz: -12dB/oct or -48dB/oct Butterworth filter or Bessel filter PASS (10kHz): -12dB/oct Bessel filter
High pass filter	
Cutoff frequency	Digital filter 0.2Hz, 1Hz and OFF
A/D converter	24 bit
Indicator	Channel LED (open, over, etc.) Unit number setting switch
Power supply	DC 10 ~ 30V, 0.2A at maximum (12V)(supplied from TMR-311)
Environment	0 ~ +50°C, 85%RH or less (no condensation)
Vibration tolerance	29.4m/s ² (10 ~ 55 Hz), 3 directions
External dimensions	200(W) × 25(H) × 100(D)mm (excluding projected parts)
Weight	Approx. 550g (including rubber protectors)

Standard accessories

Operation manual (A3 folded in one-eighth)	1 copy
Control cable CR-6490	1 pc.
Terminal block for full bridge	8 pcs.
Small flathead screwdriver	1 pc.
Bridge box SB-120T or SB-350T (to be selected when ordering)	8 pcs.

Carrier type Strain Unit TMR-323



INPUT

Strain gauge type transducer



Load cell



Acceleration transducer etc.

Specifications TMR-323

Number of measuring points	8
Input	Strain
[Strain measurement]	
Applicable gauge resistance	120 ~ 350Ω
Bridge excitation	0.5Vrms, 2Vrms 5kHz
Measuring range	±20000×10 ⁻⁶ strain (bridge excitation 2Vrms) ±80000×10 ⁻⁶ strain (bridge excitation 0.5Vrms)
Measuring accuracy	±0.3%FS (at 23±5°C)
Resolution	1×10 ⁻⁶ strain (bridge excitation 2Vrms) 4×10 ⁻⁶ strain (bridge excitation 0.5Vrms)
Balancing range	Resistance ±10000×10 ⁻⁶ strain Capacity 3000pF
Balancing method	Software method
Stability on zero	within ±0.1×10 ⁻⁶ strain/°C
Stability on sensitivity	within ±0.05%FS/°C

Most suited to measurement on site where induction noise or commercial power noise is expected

Frequency response	DC ~ 2.5kHz
Low pass filter	
Cutoff frequency	Digital filter 5Hz ~ 1kHz (settable by every 1Hz) and PASS (2.5kHz) -3dB ± 1dB
Cutoff characteristics	5Hz ~ 1kHz: -48dB/oct Butterworth filter or Bessel filter PASS (2.5kHz): Butterworth filter
High pass filter	
Cutoff frequency	Digital filter 0.2Hz, 1Hz and PASS
A/D converter	18 bit
Indicator	Channel LED (open, over, etc.) Unit number setting switch
Power supply	DC 10 ~ 30V, 0.3A at maximum (12V)(supplied from TMR-311)
Environment	0 ~ +50°C, 85%RH or less (no condensation)
Vibration tolerance	29.4m/s ² (10 ~ 55Hz), 3 directions
External dimensions	200(W) × 25(H) × 100(D)mm (excluding projected parts)
Weight	Approx. 660g (including rubber protectors)

Standard accessories

Operation manual (A3 folded in one-eighth)	1 copy
Control cable CR-6490	1 pc.
Sensor input cable CR-6186	8 pcs.

Voltage Input Unit TMR-331



INPUT

DC voltage



Specifications TMR-331

Number of measuring points	8 (BNC connector)
Input	Voltage
Input method	Single end (unbalanced) Isolated between channels
Input impedance	Approx. 100kΩ
Measuring range	±52V
Measuring accuracy	±0.2%FS (at 23±5°C)
Settable range	±52V range (resolution 5mV) ±20V range (resolution 2mV) ±10V range (resolution 1mV) ±5V range (resolution 0.5mV) ±1V range (resolution 0.1mV)

Measurement of DC voltage within the range of ±52V

Stability on zero	±0.1mV/°C (at maximum sensitivity)
Stability on sensitivity	±0.05%/°C (at maximum sensitivity)
Frequency response	DC ~ 10kHz
Low pass filter	
Cutoff frequency	Digital filter 1Hz ~ 1kHz (settable by every 1Hz) and PASS (analog filter 10kHz) -3dB ± 1dB
Cutoff characteristics	1Hz ~ 1kHz: -12dB/oct or -48dB/oct Butterworth filter or Bessel filter PASS (10kHz): -12dB/oct Bessel filter
High pass filter	
Cutoff frequency	Digital filter 0.2Hz, 1Hz and OFF
A/D converter	24 bit
Indicator	Channel LED (set, over, etc.) Unit number setting switch
Power supply	DC 10 ~ 30V, 0.25A at maximum (12V)(supplied from TMR-311)
Environment	0 ~ +50°C, 85%RH or less (no condensation)
Vibration tolerance	29.4m/s ² (10 ~ 55Hz), 3 directions
External dimensions	200(W) × 25(H) × 100(D)mm (excluding projected parts)
Weight	Approx. 550g (including rubber protectors)

Standard accessories

Operation manual (A3 folded in one-eighth)	1 copy
Control cable CR-6490	1 pc.

Thermocouple/Voltage unit TMR-332



INPUT

Thermocouple

DC voltage



Measurement of temperature using thermocouple T, K or J
Measurement of DC voltage $\pm 20V$

Specifications TMR-332

[Thermocouple measurement]		
Number of measuring points	8 (when using terminal block for thermocouple measurement)	
Applicable thermocouple	T, K, J	
Measuring range	T	-200 ~ +400°C
	K	-200 ~ +1300°C
	J	-200 ~ +1200°C
Settable range	T	-200 ~ +400°C 0.1°C resolution
	K, J	-200 ~ +600°C 0.1°C resolution -200 ~ +1300°C 0.2°C resolution
Measuring accuracy	External RJC	$\pm(0.5\%rdg+1^{\circ}C)$ (23°C $\pm 5^{\circ}C$) $\pm(0.5\%rdg+2^{\circ}C)$
	Internal RJC	$\pm(0.5\%rdg+1.5^{\circ}C)$ (23°C $\pm 5^{\circ}C$) $\pm(0.5\%rdg+2.5^{\circ}C)$
Frequency response	DC ~ 10Hz	
Linearization	Digital calculation	
[Voltage measurement]		
Number of measuring points	8 (when using terminal block for voltage measurement)	
Input method	Single-end (unbalanced) Isolated between channels	

Input impedance	Approx. 100 k Ω
Measuring range	$\pm 20V$
Settable range	$\pm 20V$ range 2mV resolution
Measuring accuracy	$\pm 0.5\%FS$
Stability on zero	$\pm 2mV/^{\circ}C$ (at maximum sensitivity)
Stability on sensitivity	$\pm 0.05\%^{\circ}C$ (at maximum sensitivity)
Frequency response	DC ~ 10 kHz
Low pass filter	
Cutoff frequency	Digital filter 1Hz ~ 1kHz (settable in increments of 1Hz) and PASS (analog filter 10kHz) 3dB $\pm 1dB$
	Cutoff characteristics 1Hz ~ 1kHz: 12dB/oct Butterworth filter or Bessel filter PASS (10kHz): 12dB/oct (Bessel filter)
A/D converter	24 bit
Indicator	Channel LED (open, over, etc.) Unit number setting switch
Power supply	DC 10V ~ 30V, 0.25A at maximum(12V) (supplied from TMR-311)
Environment	0 ~ +50°C 85%RH or less (no condensation)
Vibration tolerance	29.4m/s ² (10 ~ 55Hz) 3 directions
Dimensions	200(W) \times 25(H) \times 100(D) mm (excluding projected parts)
Weight	Approx. 550g (including rubber protectors)

Standard accessories

Operation manual (A3 folded in one-eighth)	1 copy
Control cable CR-6490	1 pc.
Terminal block for thermocouple measurement	4 pcs.
Terminal block for voltage measurement	4 pcs.

Terminal block for thermocouple measurement "TA-02T"	
Number of measuring points	2
Applicable thermocouple	T, K, J
Environment	0 ~ +50°C 85%RH or less (no condensation)
Dimensions	42(W) \times 14(H) \times 25(D) mm (excluding projected parts)
Weight	Approx. 20g

Terminal block for voltage measurement "VA-02T"	
Number of measuring points	2
Input impedance	Approx. 100 k Ω
Environment	0 ~ +50°C 85%RH or less (no condensation)
Dimensions	42(W) \times 14(H) \times 25(D) mm (excluding projected parts)
Weight	Approx. 20g

Voltage Output Unit TMR-341



OUTPUT

DC voltage



Conversion and output of data in analog voltage for
strain, temperature, etc. measured by other units

Specifications TMR-341

Number of output points	8 (BNC connector)
Output signal	Voltage output of measured data obtained by other measurement unit (measurement point for output can be set optionally) Output of the result of accumulation or subtraction of up to 4 points
Output level	$\pm 10V$, $\pm 5V$, 0 ~ +5V (5k Ω load)
Output accuracy	$\pm 0.5\%FS$
Calibration output	0V, Optional output within the range of output level
Output accuracy	$\pm 0.5\%FS$
SN ratio	50dBp-p or more (at maximum output of 10V)
Stability on zero	$\pm 0.5mV/^{\circ}C$
Stability on sensitivity	$\pm 0.05\%^{\circ}C$
Indicator	Channel LED (open, over, etc.) Unit number setting switch
Power supply	DC 10 ~ 30V, 0.3A at maximum (12V)(supplied from TMR-311)
Environment	0 ~ +50°C, 85%RH or less (no condensation)
Vibration tolerance	29.4m/s ² (10 ~ 55Hz), 3 directions
External dimensions	200(W) \times 25(H) \times 100(D)mm (excluding projected parts)
Weight	Approx. 550g (including rubber protectors)

Standard accessories

Operation manual (A3 folded in one-eighth)	1 copy
Control cable CR-6490	1 pc.

*: The voltage output unit must be connected directly under the control unit. Do not connect any measurement unit between the control unit and the voltage output unit.

TMR-351 CAN Unit

NEW



CAN signal
 Data reception Number of recordable IDs 0 to 64
 Data transmission Number of signals 0 to 8



Built-in CAN interface enables data recording and output from CAN bus

Simultaneous measurement of vehicle integrated control signals, acceleration, torque, and stress, enabling control system analysis.


Specifications TMR-351

Protocol supported	CAN Specification V2.0B active standard ISO11898(High Speed)
Communication speed	10k to 1Mbps
Number of messages	Max. 64 (Receiving: Max. 64, Sending: Max. 62)
Number of Signals	Max. 512
Data Receiving	Records messages with specified ID Number of recordable IDs: 0 to 64 Data length: 1 to 8Byte When monitoring and recording with the TMR-311, the signal (2byte)×8CH
Data Sending	Data output on specified channel Number of outputtable data: 0 to 64 Data length: 16bit (2Byte)
Record	Max. 32 Mbyte (internal RAM) All messages are recorded separately after data from other measurement units are recorded by TMR-311.
Function	Data bit specification, endian setting Selectable between data frames, remote frames, and return on receipt of remote frames for transmitted messages Selectable message transmission cycle Selectable listen-only mode
Indication	Unit number setting switch CAN SIGNAL: CAN bus signal RECEIVE: Receiving SEND: Transmitting
Connector	D-Sub 9-pin connector (male) CAN input withstand voltage -27V to 40VDCMAX
Power supply	0.2A MAX(12V)(supplied by TMR-311)
Environment	0 to +50°C, 85%RH or less (excluding condensation)
Vibration tolerance	29.4m/s ² (10 to 55Hz) 3 directions
Dimensions	200(W)×25(H)×100(D)mm (excluding protruding parts)
Weight	Approx. 530g (including rubber protector)

Standard accessories

Operation manual (A3 folded in one-eighth)	1 copy
Control cable CR-6490	1 pc.
CAN cable CR-6480	1 pc.

Digital I/O unit TMR-353

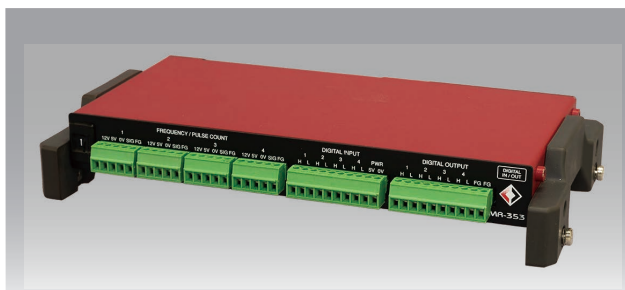

INPUT Square wave or Sine wave OUTPUT Open collector



Counting and frequency measurement of digital pulse from rotary encoder or speed sensor
Various digital inputs and outputs necessary for measurement such as trigger (measurement start) signal input, sampling clock signal input/output and alarm (upper/lower setting) output

Specifications TMR-353

[Frequency measurement and pulse counting]			
Number of input points	4		
Input signal waveform	Square wave or Sine wave		
Maximum input voltage	±15V		
Measurement voltage range	Minimum input signal: 50mVp-p Maximum input signal: ±12V		
Frequency response	1Hz ~ 100kHz		
Threshold level	Low	High level +15mV	Low level -15mV
	Middle	High level +100mV	Low level -100mV
	High	High level +1.0V	Low level -1.0V
	Digital	TTL, CMOS	
	Arbitrary	Setting range: ±10V	Settable in increments of 0.1V
Threshold level accuracy	When set to ±15mV: ±(15mV + 5mV) Except the above: ±(1%rdg + 50mV)		
Frequency measurement accuracy	±0.1%FS		

Frequency range	100kHz range (10Hz resolution), 50kHz range (5Hz resolution) 10kHz range (1Hz resolution), 5kHz range (0.5Hz resolution) 1kHz range (0.1Hz resolution), 500Hz range (0.05Hz resolution) 100Hz range (0.01Hz resolution)
Power supply output	Output voltage: 5V/12V Output current: 5V/50mA, 12V/25mA (5V and 12V cannot be used at the same time)
Count range	0 ~ 29999 counts 0 ~ 899999999 counts (1+2 channels 32bit counter mode)
Function	Frequency measurement, Number of counts measurement Rotary encoder operation Phase A and phase B count operation Phase A, phase B and phase Z angle operation
[Digital input]	
Number of input points	4
Isolation method	Photocoupler isolation
Maximum applicable voltage	15V
Operation current	4mA ~ 25mA
Input pulse width	0.5ms or more (frequency response: 1kHz or less), Negative logic
Power supply output	Output voltage: 5V Output current: 50mA
Function	Trigger input, External sampling input, Marker signal input Balancing signal input, Calibration output signal input (zero/+/-) Start of measurement (RUN), Stop of measurement (HALT) Temporary stop of measurement (PAUSE) (Arbitrarily settable to each input)
[Digital output]	
Number of output point	Trigger signal output: 1 Sampling signal output: 1 Alarm (upper): 1 Alarm (lower): 1
Output format	Open collector output Maximum applicable voltage: 15V Maximum load current: 5mA Maximum voltage at ON: 0.5V or less
Sampling output	Output signal frequency: 1kHz or less
Indication	Unit number setting switch
Power supply	0.5A at maximum(12V) (supplied from TMR-311)
Environment	0 ~ +50°C 85%RH or less (no condensation)
Vibration tolerance	29.4m/s ² (10 ~ 55Hz) 3 directions
Dimensions	200(W) × 25(H) × 100(D) mm (excluding projected parts)
Weight	Approx. 550g (including rubber protectors)

Standard accessories

Operation manual (A3 folded in one-eighth)	1 copy
Control cable CR-6490	1 pc.
Small flat-head screwdriver	1 pc.
Terminal block for frequency/pulse count	4 pcs.
Terminal block for digital input/output	2 pcs.

Distribution Unit TMR-371



HUB-Unit for distributing measurement units

Specifications TMR-371

Number of connection of distribution unit	1 (for one TMR-311)
Number of connection of measurement unit	10 (including measurement units directly connected to TMR-311)
Power supply	DC 10 ~ 30V, 0.2A at maximum (12V) (supplied from TMR-311)
Environment	0 ~ +50°C, 85%RH or less (no condensation)
Vibration tolerance	29.4m/s ² (10 ~ 55Hz), 3 directions
External dimensions	200(W) × 50(H) × 100(D)mm (excluding projected parts)
Weight	Approx. 800g (including rubber protectors)

Standard accessories

Operation manual (A3 folded in one-eighth)	1 copy
Control cable CR-6490	1 pc.

Distribution Adapter TMR-371-1



Extension between distribution unit and measurement unit up to 100 meters Measurement unit is placed close to the sensor to save sensor cable

Specifications TMR-371-1

Number of connection of distribution adapter	10 (for one TMR-371)
Number of connection of measurement unit	1
Extension distance	100m
Environment	0 ~ +50°C, 85%RH or less (no condensation)
Vibration tolerance	29.4m/s ² (10 ~ 55Hz), 3 directions
External dimensions	130(W) × 25(H) × 50(D)mm (excluding projected parts)
Weight	Approx. 150g

Standard accessories

Operation manual (A3 folded in one-eighth)	1 copy
--	--------

Distributed measurement system

The distribution unit TMR-371 and the distribution adapter TMR-371-1 are available to enable distribution and extension of measurement units of TMR-300 series. By connecting the distribution unit to a control unit, and also connecting the distribution adapter to a measurement unit, the distance between the control unit (distribution unit) and the measurement unit (distribution adapter) can be extended up to 100 meters. Ten measurement units can be connected to one distribution unit at the maximum. Even

if ten measurement units are distributed and extended, it is possible to apply 100 kHz sampling at the fastest which is the same as the sampling without extension. Since the power of the measurement unit is supplied through the connection cable, one connection cable functions to communicate with, synchronize, and supply power to the measurement unit.

FEATURES

Measurement units can be distributed in star-type connection

The connection between the distribution unit TMR-371 and each measurement unit (distribution adapter TMR-371-1) is made by STP cable (100 m at the maximum). Synchronized measurement of sensors scattered in a large area can be easily performed.

Power supply from distribution unit


The power is supplied from the distribution unit TMR-371 to each distributed measurement unit. Additional power supply arrangement is not necessary.

Sensor cables are saved

Since the measurement unit is placed close to the sensors, small cable lengths are required for connecting sensors. Stable measurement is possible because the sensor outputs are converted into digital signals in the measurement unit and transferred beyond.

Up to 10 measurement units are connected

Ten measurement units can be connected at the maximum including measurement units directly connected to the control unit.

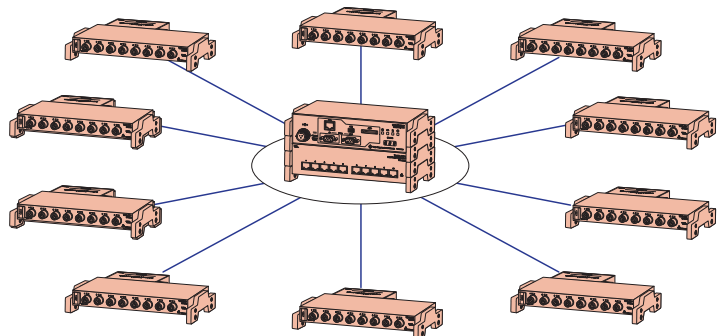


Synchronization unit TMR-372



Connection of synchronization unit

The synchronization unit TMR-372 enables measurement using TMR-300 series synchronized with TMR-200 series. Sampling and synchronized trigger measurement is possible using up to four control units including TMR-211.

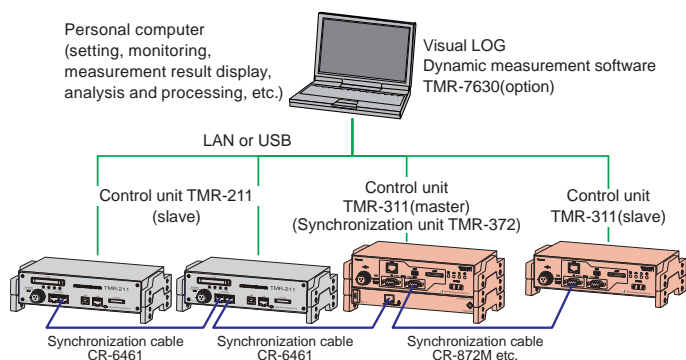

Synchronization with TMR-200 series

Specifications TMR-372


Connection	
Applicable unit for synchronization	TMR-211
Number of connection of TMR-211	3 units at the maximum
Synchronization of multiple units	<ul style="list-style-type: none"> 4 units at the maximum (including the master unit) <ul style="list-style-type: none"> TMR-311 × 1 + TMR-211 × 3 TMR-311 × 2 + TMR-211 × 2 TMR-311 × 3 + TMR-211 × 1 Only one TMR-372 can be connected in one system. If two or more TMR-311 are used, the TMR-372 must be connected to the master side. The number of connectable units is limited to nine for the TMR-311 to which the TMR-372 is connected.
Delay time	<p>If the measurement is started from TMR-311 at the fastest sampling of 100kHz (10μs), the data of TMR-311 will be delayed by 390μs from the data of TMR-211.</p> <p>If the measurement is started from TMR-211 at the fastest sampling of 100kHz (10μs), the data of TMR-311 will be delayed by 350μs from the data of TMR-211.</p>
General specifications	
Indication	Unit number setting switch
Power supply	0.25A at maximum(12V) (supplied from TMR-311)
Environment	0 ~ +50°C 85%RH or less (no condensation)
Vibration tolerance	29.4m/s ² (10 ~ 55Hz) 3 directions
Dimensions	200(W) × 25(H) × 100(D) mm (excluding projected parts)
Weight	Approx. 500g (including rubber protectors)

Standard accessories

Operation manual (A3 folded in one-eighth)	1 copy
Control cable CR-6490	1 pc.
Synchronization cable CR-6461	1 pc.

- When using the synchronization unit, use the dynamic measurement software "TMR-7630" for controlling the system.

TMR-361 Charge amplifier unit

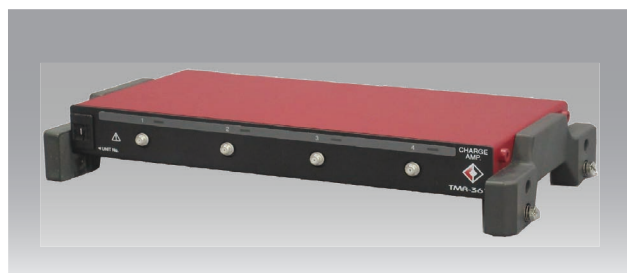

Input Charge output type
Piezoelectric accelerometer (other manufacturer's product)

Compatible with Piezoelectric accelerometers featuring high frequency response and a high operating temperature range

Specifications TMR-361

Number of measuring points	4 channels
Compatible sensors	Charge output type accelerometers, Charge sensitivity 0.1 to 10pC/(m/s ²)
Input connector	Miniature connector 10-32UNF
Allowable charge Input	10000pC
Measurement accuracy	±3%FS (100Hz, at 23±5°C)
Measuring range	250pC range resolution 0.01pC Equivalent to 250m/s ² at charge sensitivity 1pC/(m/s ²) 2500pC range resolution 0.1pC Equivalent to 2500m/s ² at charge sensitivity 1pC/(m/s ²) 10000pC range resolution 0.4pC Equivalent to 10000m/s ² at charge sensitivity 1pC/(m/s ²)
Frequency response	1Hz~10kHz

Low pass filter	
Cutoff frequency	Digital filter 1Hzto1kHz (settable in unit of 1Hz) Pass (Analog filter 10kHz) -3dB ± 1 dB
High pass filter	1 to 1kHz: -12dB±1dB/oct Butterworth or Bessel filter PASS(10kHz): Bessel filter
High pass filter	
Cutoff frequency	Digital filter Fixed 1Hz
Display	Channel LEDs (set, over, etc.) Unit number setting switch
Power supply	0.35A MAX(12V) (Supplied from TMR-311)
Temperature and humidity range	0 to +50°C, 85%RH or less (excluding condensation)
Vibration resistance	29.4 m/s ² (10 to 55 Hz) in 3 directions
External dimensions	200 (W) ×25 (H) ×100 (D) mm (Excluding protrusions)
Weight	Approx. 550g (including rubber protector)

Standard accessories

Operation manual (A3 folded in one-eighth)	1 copy
Control cable CR-6490	1 pc.
Synchronization cable CR-6461	1 pc.

Adaptive Accelerometer Connector Shape

The input connector of TMR-361 is a miniature connector 10-32UNF. (See the photo.) If the cable connector of the charge output type accelerometer is 10-32UNF (male type), it can be connected.

Measurement software

Dynamic measurement software TMR-7300, RD-7300 and RD-7300E, which are capable of measuring up to 80 channels using one control unit, are supplied to the TMR-311 as standard accessories. Optional software programs with expanded functions are also available.

Applicable software	Standard software	Optional software
Dynamic measurement software	TMR-7300	TMR-7630 TMR-7630-H (Frequency analysis) TMR-7630-M (Video applicable)
Real time data acquisition software	RD-7300	RD-7640
Waveform view software	RD-7300-E	WF-7630

Dynamic measurement software TMR-7300 (standard software)

The dynamic measurement software TMR-7300 controls one TMR-311 for on-line and off-line measurement. Monitoring, acquisition, edition (listing and chart drawing) and processing of data, and data calculation using expanded channels are possible. In off-line measurement, free-run, data trigger and program measurement can be executed.

System	
OS	Windows Vista(SP2), 7(SP1), 8, 8.1, 10
Computer	Model recommended by the above OS with dual or more core CPU is recommended
Interface	Wireless LAN *1, LAN(100BASE-TX), USB
Memory capacity	4GB or more is recommended
HDD capacity	Free space of 5GB or more
Basic specifications	
Applicable instrument	TMR-311, TMR-211 Maximum number of connection: 1
Number of measuring points	80 channels at maximum
Expanded channel	1000 channels at maximum (four arithmetic operation, various functions and rosette analysis)
On-line measurement	Balance, Monitor, Manual, Interval, Data comparater, Free run, Data trigger, Program measurement, Alarm output
Off-line measurement	Free run, Data trigger, Program measurement
Display	Value monitor, T-Y monitor, T-Y graph, Bar monitor, Spectrum
Data format	DADiSP format Conversion to text file (CSV format) possible
Data processing	Display and print of T-Y graph, Display of value list

*1: Built-in wireless LAN is not available for overseas model of TMR-311.

Dynamic measurement software RD-7300 for real time data acquisition (standard software)

The software RD-7300 directly collects the data measured by TMR-300 series into a personal computer and records them. Long-time and large-capacity recording is possible without depending on the capacity of the TMR-311 data memory or a SD card. Data processing is possible by the software RD-7300-E which is also supplied as standard accessory.

System	
OS	Windows Vista(SP2), 7(SP1), 8, 8.1, 10
Computer	Model recommended by the above OS with dual or more core CPU is recommended
Interface	LAN(100BASE-TX)
Memory capacity	4GB or more is recommended
HDD capacity	Free space of 5GB or more
Basic specifications	
Applicable instrument	TMR-311 Maximum number of connection: 1
Number of measuring points	80 channels at maximum
Sampling clock	Setting is possible within the range of 0.1 to 0.9ms (by every 0.1ms) and 1 to 1000ms (by every 1ms) If the number of used channels is 41 or more for one instrument, the fastest sampling clock is 0.2ms
Expanded channel	1000 channels at maximum (four arithmetic operation, various functions and rosette analysis)
Measurement	Monitor measurement, Manual measurement, Data trigger measurement, Interval measurement
Display	Value monitor, T-Y monitor, T-Y graph, Bar monitor, Spectrum, Dial scale monitor, Vector monitor, Arrow monitor


Data editing Software RD-7300-E (standard software)

This software performs post-processing of data files collected by the RD-7300 such as file management, batch processing of two or more files and chart creation.

System	
Applicable data file	*.hed / *.dat (DADiSP compatible format)
OS	Windows Vista(SP2), 7(SP1), 8, 8.1, 10
CPU	Conforms to the system requirements of the above OS
Memory	Conforms to the system requirements of the above OS
Disc capacity	Free space of 5GB or more
Basic specifications	
Data file management	Processings below are applied to optionally selected two or more files File display, File rename, File move, Text conversion, Merging files
Data file processing	Re-setting of channel setting Setting of expanded channel and re-calculation Searching maximum/minimum values, Cutting out, Thinning out, Text conversion
Graph display	T-Y graph, X-Y graph, Spectrum, Label, Saving, Text saving, Copy of graph, Saving pictures

Visual LOG® Waveform view software WF-7630 (option)

The software WF-7630 is for viewing DADiSP format data as data list and waveform. DADiSP format data outputted by our instrument TMR-311/TMR-211 or software RD-7640/TMR-7300/TMR-7630 and so on are acceptable. It is possible to execute re-calculation of data, merging, cutting out, thinning out and CSV conversion of data files, searching of maximum/minimum values, FFT analysis, and calculation and chart drawing (X-Y, T-Y, spectrum) of expanded channels.

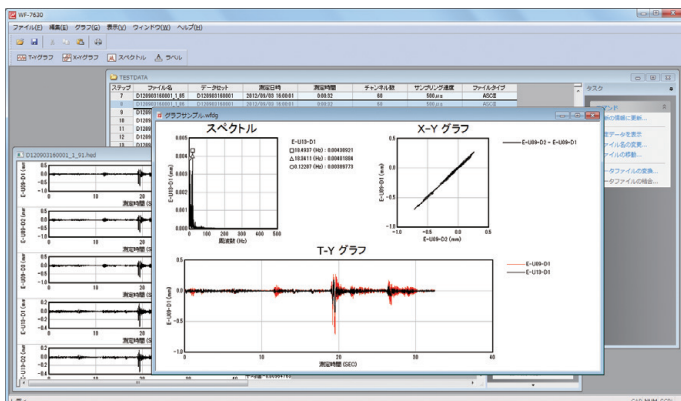

System	
Applicable data file	*.hed / *.dat (DADiSP compatible format) DADiSP file of Integer format or ASCII format outputted from instrument TMR-311/TMR-211/DC-204/DC-104/DH-14A, or dynamic measurement software RD-7640/TMR-7630/TMR-7300/TMR-7200/DS-750/DC-7630/DRA-7630/DC-7004P (below referred to as data file) Note) If GPS data and/or frequency data are included in measurement data recorded by TMR-211, the measurement data cannot be read by this software.
OS	Windows Vista(SP2), 7(SP1), 8, 8.1, 10
CPU	Conforms to the system requirements of the above OS
Memory	Conforms to the system requirements of the above OS
Disc capacity	Free space of 5GB or more
Basic specifications	
Data file	Maximum number of channels: 1000 Number of expanded channels: 1000
Data file management	Processings below are applied to optionally selected two or more data files File display, File rename, File move, Text conversion, Merging files
Data file processing	Re-setting of channel setting Setting of expanded channel and re-calculation Searching maximum/minimum values, Cutting out, Thinning out, Text conversion
Graph display	T-Y graph, X-Y graph, Spectrum, Label, Saving, Text saving, Copying graph, Saving pictures

Visual LOG® Dynamic measurement software TMR-7630 (option)

System	
OS	Windows Vista(SP2), 7(SP1), 8, 8.1, 10
Computer	Model recommended by the above OS with dual or more core CPU is recommended
Interface	Wireless LAN *1, LAN(100BASE-TX), USB
Memory capacity	4GB or more is recommended
HDD capacity	Free space of 10GB or more is recommended
Protect key	USB dongle
Basic specifications	
Applicable instrument	TMR-311, TMR-211 Maximum number of connection: 4
Number of measuring points	320 channels at maximum
Expanded channel	1000 channels at maximum (four arithmetic operation, various functions and rosette analysis)
On-line measurement	Balance, Monitor, Manual, Interval, Data comparer, Free run, Data trigger, Program measurement, Alarm output
Off-line measurement	Free run, Data trigger, Program measurement
Display	Value monitor, T-Y monitor, T-Y graph, Bar monitor, Spectrum
Data format	DADISP format Conversion to text file (CSV format) possible
Data processing	Display and print of T-Y graph, Display of value list

*1: Built-in wireless LAN is not available for overseas model of TMR-311.



[Option]

TMR-7630-H

Performs frequency analysis of measured dynamic wave form in post-processing. Frequency analysis and S-N analysis of expanded channels are also possible.


TMR-7630-M

Videos taken by a camera conforming to DirectX are saved linking with the measurement. The saved data are reproduced in synchronization with the video.

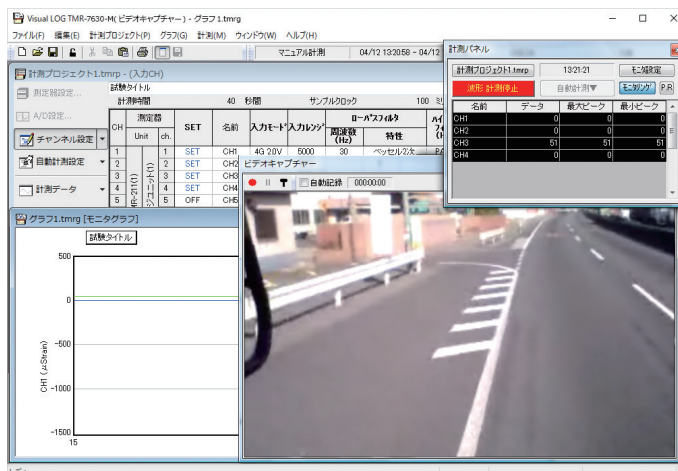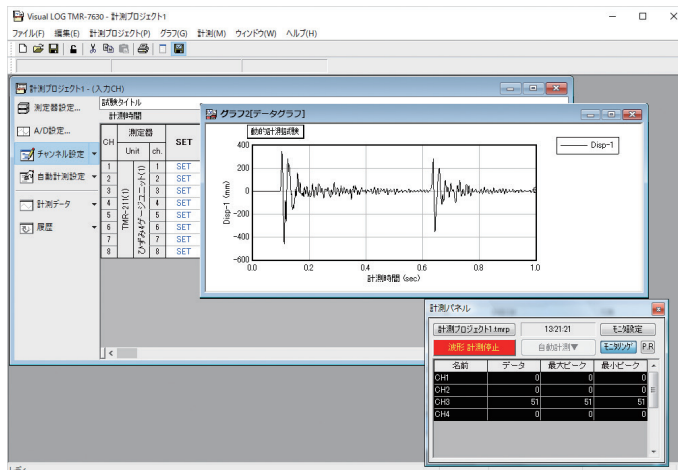

Visual LOG® Real time data acquisition software RD-7640 (option)

System	
OS	Windows Vista(SP2), 7(SP1), 8, 8.1, 10
Computer	Model recommended by the above OS with CPU of Intel Core i5 3.0GHz or higher is recommended (excluding Turbo Boost)
Interface	LAN(100BASE-TX)
Memory capacity	4GB or more is recommended
HDD capacity	Free space of 5GB or more
Protect key	USB dongle
Basic specifications	
Applicable instrument	TMR-311 Maximum number of connection: 4 In addition, this software is applicable to DS-50A and TFM-104
Sampling clock (when using TMR-311)	Setting is possible within the range of 0.1 to 0.9ms (by every 0.1ms) and 1 to 1000ms (by every 1ms) If the number of used channels is 41 or more for one instrument, the fastest sampling clock is 0.2ms
Expanded channel	1000 channels at maximum (four arithmetic operation, various functions and rosette analysis)
Measurement	Monitor measurement, Manual measurement, Data trigger measurement, Interval measurement
Display	Value monitor, T-Y monitor, T-Y graph, Bar monitor, Spectrum, Dial scale monitor, Vector monitor, Arrow monitor

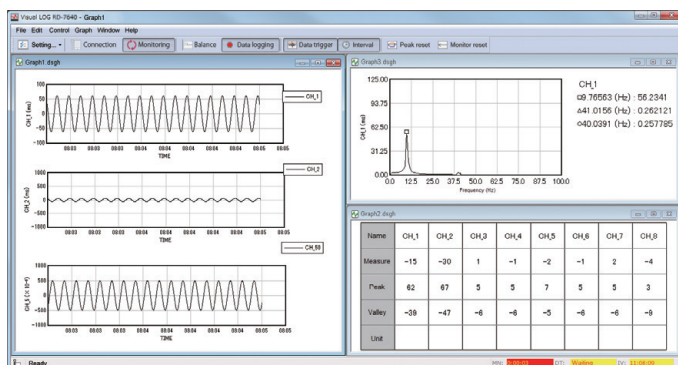

[Optional]

RD-7640-M

Waveform data and video can be recorded in conjunction using video and audio devices connected to a PC.

Frequency analysis library TMR-311-01

This software option adds frequency analysis capability to the TMR-300 series of multi-recorder systems.

Specifications TMR-311-01 (software option for TMR-311)

Analytical method	Peak/valley method, Maximum and minimum value method, Time method, Amplitude method, Level crossing method, Rain flow method
Number of Analyses	80 Analysis (any channel)
Number of slices	Maximum 100 (Arbitrary setting of up to 100 slices within ±100)
full-scale	200 to 20000 x 10 ⁻⁶ Strain
Counting capacity	Approx. 4.2 billion counts / slice
Reactive Amplitude	4 to 5000 x 10 ⁻⁶ strain (useful for analysis other than time method)
file function	File recording of frequency data (Frequency data can be filed at regular intervals and cumulative frequency data can be filed)

*Analysis conditions: Sampling speed must be slower than 1 ms, and an SD card must be inserted.



Frequency measurement setting screen and graph display screen using TMR-381 display unit

Option

AC adapter CR-1897

Using the AC adapter CR-1897, AC operation of TMR-311 with connected measurement units is possible. The adapter accepts AC power source of 100 – 240V, 50/60Hz.



Bridge Box SB-120T / SB-350T

These are connected to the strain 1G2G4G unit TMR-322 and used to connect strain gauges in quarter bridge 3-wire or half bridge method. Eight pieces of SB-120T or SB-350T are supplied with the TMR-322 as standard accessories.



Number of measuring point	1
Applicable gauge resistance	120Ω (SB-120T) 350Ω (SB-350T)
Connection method	Quarter bridge 3-wire, Half bridge
Environment	0 ~ +50°C, 85%RH or less (no condensation)
External dimensions	20(W) × 14.5(H) × 25(D) mm (excluding projected parts)
Weight	Approx. 10g

Attenuator cable CR-4010

This is used for voltage measurement with TMR-321.



Control unit synchronization cable (TML-Link)

When two, three or four numbers of control unit TMR-311 are used together, those control units are cascaded using this cable for synchronization. The maximum extension distance is 100meters between each two control units.



CR-8701

Type	Cable length
CR-872M	2m
CR-875M	5m
CR-8701	10m
CR-8702	20m
CR-8705	50m
CR-8710	100m

Control cable for extension

This cable is used when extending the connection between the control unit and the measurement unit. The maximum available extension distance is 5 meters.



CR-6491

Type	Cable length
CR-6491	1m
CR-6493	3m
CR-6495	5m

Extension cable for distribution adapter (STP cable)

This is a STP (Shielded Twisted Pair) cable used for connecting between the distribution unit TMR-371 and the distribution adapter TMR-371-1. The maximum available extension distance is 100 meters.



CR-8899

Type	Cable length
CR-8805	5m
CR-8810	10m
CR-8820	20m
CR-8850	50m
CR-8899	100m

Installation jigs for display unit

Sucking stand

This is a stand with suckers used for installing the display unit on the windshield of a vehicle. (Supplied with dedicated screws.)



Tilting-type fixing stand

This stand is mounted on the multi-recorder main body. Angle of the display unit can be optionally adjusted. (Supplied with dedicated screws.)



Handles

These are attached to the upper sides of the control unit and used for carrying and/or fixing the combined control unit and measurement units. (Screws for attaching the handles are included.)



Brackets

These are attached to the lower sides of the bottom unit and used for the installation of the combined control unit and measurement units. (Screws for attaching the brackets are included.)



Related products

Thermocouple adapter TA-01KT



This adapter is designed for temperature measurement with T or K type thermocouple using a DC exciting strain meter.

Number of measuring point	1
Applicable thermocouple	K, T
Response time	20ms or less (0 to 90%)
Sensitivity	10μV/°C (at bridge excitation 2V)
Environment	0~+50°C, 85%RH or less (no condensation)
External dimensions	22(W)×41(H)×70(D)mm (excluding projected parts)
Weight	100g

The contents of this catalog are subject to change without prior notice.
The contents of this catalog are as of October 2022. TML Parm E-4012G.



Approval Certificate ISO9001
Design and manufacture of strain gauges, strain measuring equipment and transducers



Tokyo Measuring Instruments Lab.

株式会社東京測器研究所 (URL) www.tml.jp/e

8-2, Minami-ohi 6-chome, Shinagawa-ku, Tokyo 140-8560, JAPAN
TEL: +81-3-3763-5614 FAX: +81-3-3763-6128

